

Nature Mini PRO (PoE)

LS268-WP1/GP1

LifeSmart

Highlights

- 480*480P high definition 4 inch display
- Works as both gateway and smart switch
- Built-in speaker
- Linux OS to ensure low-power and stable operation
- 16A magnetic latching relay to ensure the electrical safety
- Supports voice control via Google, Alexa and HomeKit by adding Nature Mini PRO switches to LifeSmart Smart Station
- Remote control via mobile app
- Supports 2.5G+5G Wi-Fi connection
- Supports multiple protocols including CoSS, Zigbee, Wi-Fi
- Support PoE power supply

Features

Smart Home Devices Management and Control | The built-in gateway makes it easy to add, manage and control your smart home devices via a touch panel. Just one click to switch between scenes and initiate device coordination. All the LifeSmart CoSS products can be added to Nature Mini PRO, and customers can control the curtain, shutter, light, HVAC panel, and also SONOS music box.

PoE Power Supply | Supports two methods of power supply including DC 12V and PoE 48V.

Stable Network | Support RJ45 interface for stable network connection.

Two Operation Types | Nature Mini PRO can be used as a gateway, as well as a switch panel--it meets all your requirements and wishes for a smart panel switch

Description

Nature Mini PRO (PoE) reinvents the smart home control panel with a full screen, edge to edge touch pad, **with PoE power supply**. It could be an in-wall light switch, a scene panel, a weather display or even works as a thermostat. Users are able to control various types of smart equipment at home, switching between modes including Away, Sleep, Film, and Dining; or to precisely control their curtains, adjust brightness and color of their lights, and temperatures of their air conditioner. Nature Mini PRO (PoE) effectively enhance your smart life experience!



White



Gray

Nature Mini PRO (PoE)

LS268-WP1/GP1

LifeSmart

Spec

General

Model Number	LS268-WP1/GP1
Installation	In-wall concealed with 86 back box
Operating Temperature	-5~45°C
Operating Humidity	5~90%
Network	Wi-Fi 2.4GHz/5GHz
Interface	PoE Ethernet, DC In +12V, GND
Screen	4 inch
Resolution	480*480
Operation System	Linux
Power Supply	DC 12V or PoE 48V
Bluetooth	No
Speaker	Yes

Radio


Radio Protocol	CoSS, Zigbee, Wi-Fi
Signal Range(Open Field)	200m(CoSS)

Construction

White/Black	White/Gray
Dimension	Outside the wall:86*86*11mm; Whole product:86*86*36mm;
Casing	Flameresistant PC
Net Weight	141g
Gross Weight	199g



Software

Functions	One-click pairing, device management, weather display, scenes control, multi GUI skin, device control, remote control via mobile app
Support Devices	All CoSS equipment, SONOS music box
Controllable Devices	Switches, lights, curtain motors, tubular motors, underfloor thermostats, fan coil thermostat, air conditioner gateways, electrical appliances(via SPOT-universal infrared controllers), etc.

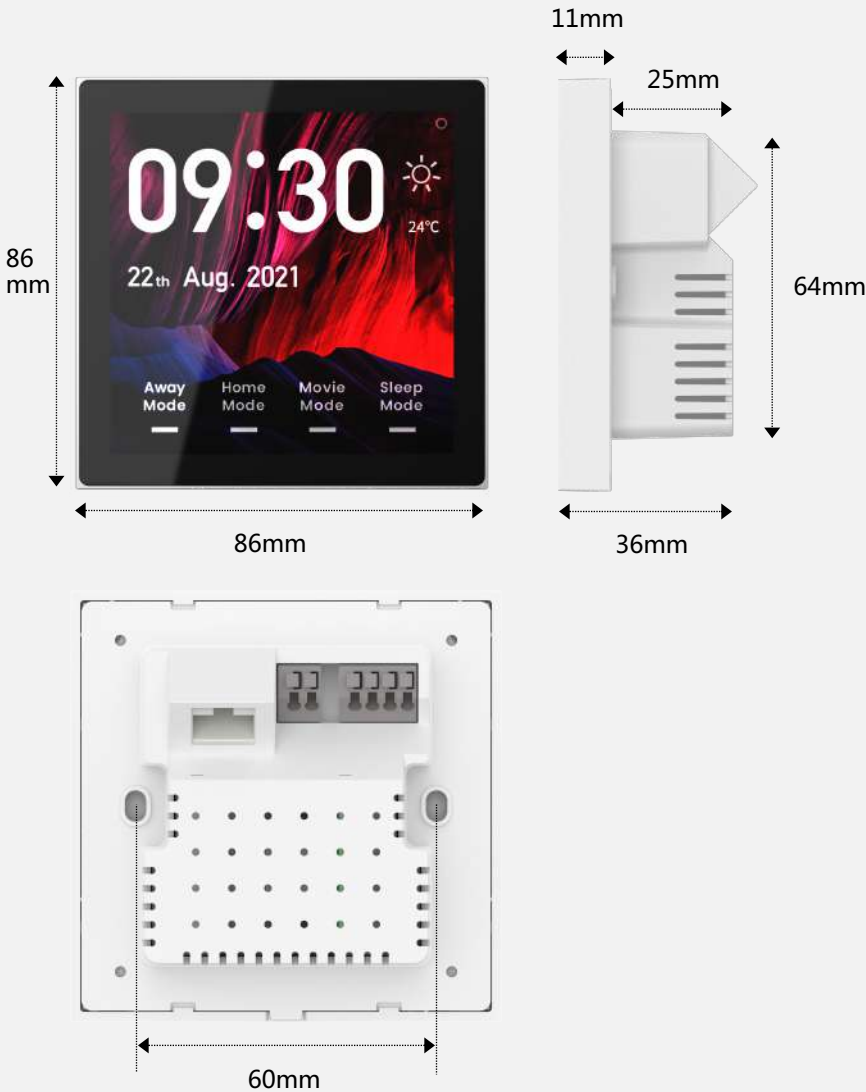

Installation

*The Smart Control Panel and Accessor must be of PoE version at the same time to be used together.
Do not use the PoE panel for other accessories , or use the PoE accessory for other panels.
If the panel and accessory are used incorrectly as a set , the equipment may be damaged.

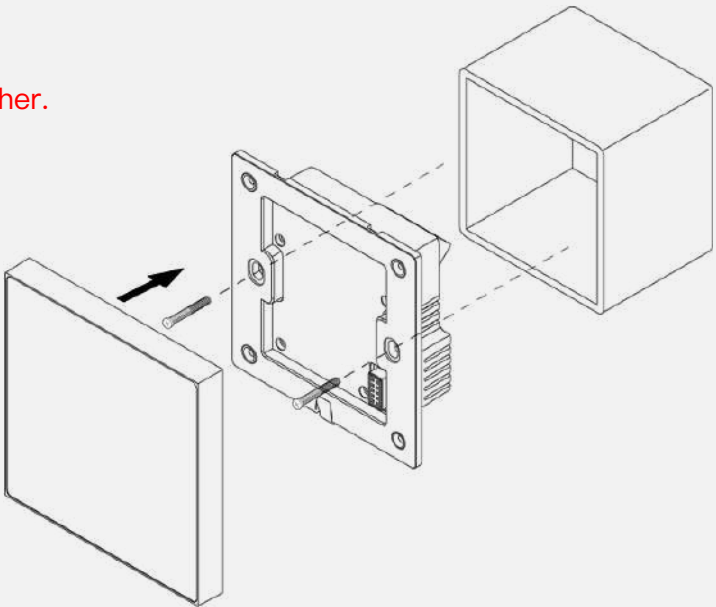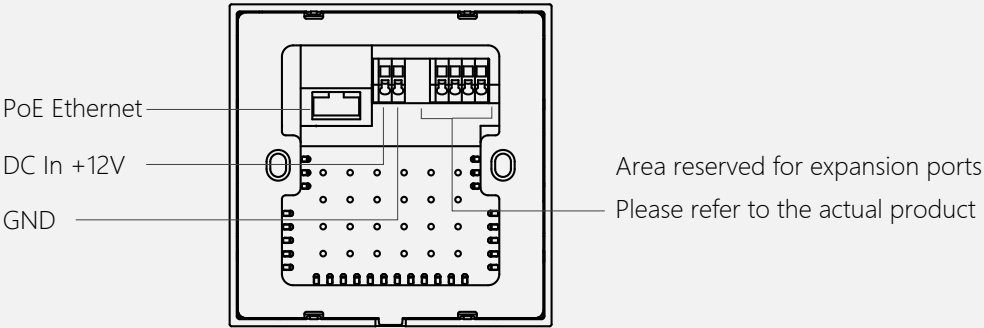

Recommended Products



Central AC
Smart Gateway



CUBE Environmental
Sensor



Nature Mini PRO
Thermostat



Nature Switch



SPOT (Universal
Infrared Controller)



Quick Curtain Motor



BLEND Light Strip



More